

Especies	Paulownia	
Tallas	Espesor	3mm-50mm, acepta espesores especiales
	Ancho	100 mm-1220 mm
	Longitud	100 mm-5000 mm
Color	Blanqueado, sin blanquear	
Calificación	A,AB,B,BC,C (Grado A: con línea laminada recta, sin nudos; Grado AB: la línea laminada no es tan recta, con pocos nudos)	
Contenido de humedad	8%-12%	
Tipo de pegamento	Pegamento colgante ecológico de Alemania	
Embalaje	Apto para exportación embalado estándar en pallets	
El tiempo de entrega	20 días normalmente después de recibir L/C o el depósito	
Términos de pago	LC, TT	
La orden mínima	1 X 20 GP	
Uso	Adecuado para muebles de calidad alta, media y baja, como cajones, listones de cama, puertas, artes y manualidades, decoración, ataúdes, tablas de surf, kitesurf, snowboard, etc.	
Principales Mercados	Europa, Malasia, Vietnam, Tailandia, Indonesia, América, Japón, Medio Oriente, etc.	
Precio	Fob Qingdao o Lianyungang, CIF o CFR	



18 years of industry experience

Professional Design Production Team

we uphold the customer first attitude to serve our every customer, look forward to working with you!



OUR ADVANTAGES

Natural Wood Environmental Glue



OWN FACTORY

With many years of production history and a professional technical team



HIGH QUALITY

We are manufacturers direct sales, with strict quality control



FAVORABLE PRICE

Cheap and affordable with no compromise on quality



CLIENT SERVICE

Professional Customer Service



SUPPORT CUSTOMIZATION

Customized products according to your needs



QUALITY WOOD

Selection of wood ensures the quality of the product



Woodland

PRODUCT SHOWCASE

Natural Wood Environmental Glue



01

STRONG AND
ENVIRONMENTAL
GLUE

02

TASTLESS
AND
ANTI-CORROSION

03

SMOOTHLY
SURFACE

04

STRAIGHT
EDGES











Product Details

Excellent
quality

Rigorous structure and fine workmanship

1

PAULOWNIA FINGER JOINT BOARD



Low weight and good stability




2

SOLID WOOD BATTEN



Natural color, fine texture. customized
size with grooving is accepted

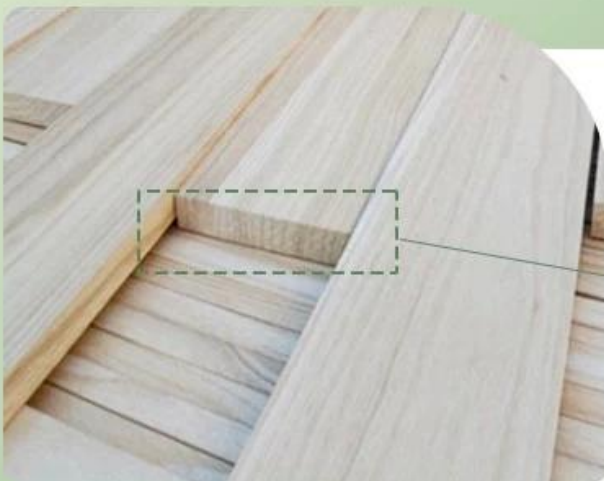

3

PAULOWNIA BOARD WITH EMBOSSING



Extremely light and fine texture Tasteless and
resistance to wear.
The best choice for decoration.



PRODUCTION PROCESS



Air dry for about 2-3 months



Glue joint



Sanding surface



Cutting



Inspect piece by piece



Package



Loading

FAQ

Natural Wood Environmental Glue

Q Are you a trader or factory?

A We are a more than 20 years exported experiences professional factory.

Q Can I get some free samples?

A Samples are available if necessary.

Q What is the production lead time for the full order ?

A It takes about 15 to 25 days for regular specifications, about 30 days for customized specifications.

Q What kind of payment do you accept ?

A T/T, L/C, Western Union.

Q How to ship the goods?

A Usually by sea or train.