


□	□□□□ □□□ □□ □□
□□	□□ 3mm-50mm, □□ □□ □□
□□	□□ 100mm-1220mm
□□	□□ 100mm-5000mm
□□	□□, □□□□ □□
□□	□□,AB,B,BC,C (□□: □□ □□ □□, □□ □□; AB □□:□□ □□ □□□ □□□ □□ □□□□)
□□□	8%-12%
□□□ □□	□□□ □□□ □□ □□□
□□	□□□□ □□□ □□ □□□ □□
□□ □□	□□□□□ L/C □□ □□□ □□ □ 20□
□□ □□	□□□, TT
□□ □□	1X20 GP
□□	□□, □□ □□□, □, □□ □ □□, □□, □, □□ □□, □□□ □□, □□□ □□ □□ □□ □□, □□, □□ □□□ □□□□□.
□□ □□	□□, □□□□□, □□□, □□, □□□□□, □□, □□, □□ □
□□	Fob □□ □□ □□□, CIF □□ CFR



# Woodland

## PRODUCT SHOWCASE

Natural Wood Environmental Glue

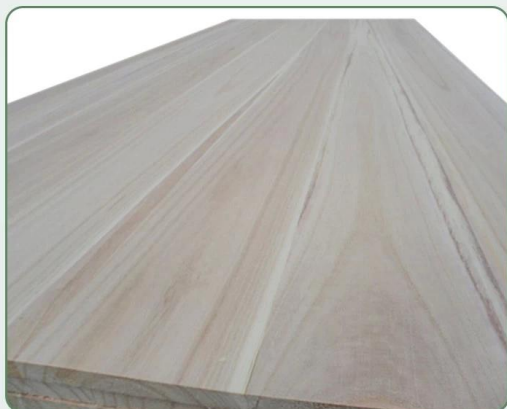

*Paulownia edge  
glued boards  
extremely light  
natural  
texture*

01

STRONG AND  
ENVIRONMENTAL  
GLUE

02

TASTLESS  
AND  
ANTI-CORROSION

03

SMOOTHLY  
SURFACE

04

STRAIGHT  
EDGES

# Product Details

Excellent  
quality

— .  
Rigorous structure and fine workmanship

1

## PAULOWNIA FINGER JOINT BOARD



Low weight and good stability




2

## SOLID WOOD BATTEN



Natural color, fine texture. customized  
size with grooving is accepted

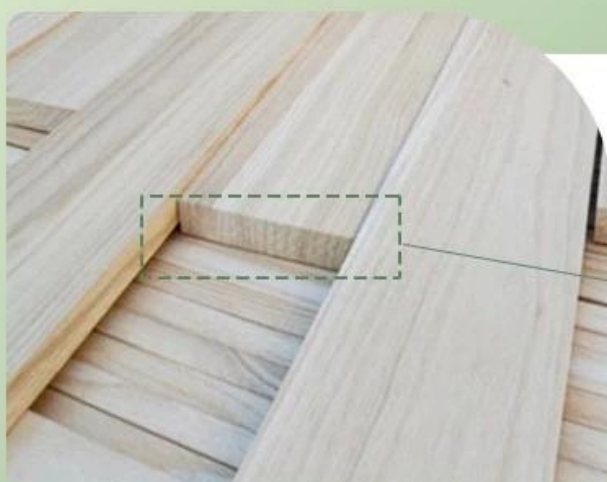

3

## PAULOWNIA BOARD WITH EMBOSSING



Extremely light and fine texture Tasteless and  
resistance to wear.  
The best choice for decoration.



# PRODUCTION PROCESS



Air dry for about 2-3 months



Glue joint



Sanding surface



Cutting



Inspect piece by piece



Package



Loading



